


16-Channel Remote Control Instructions

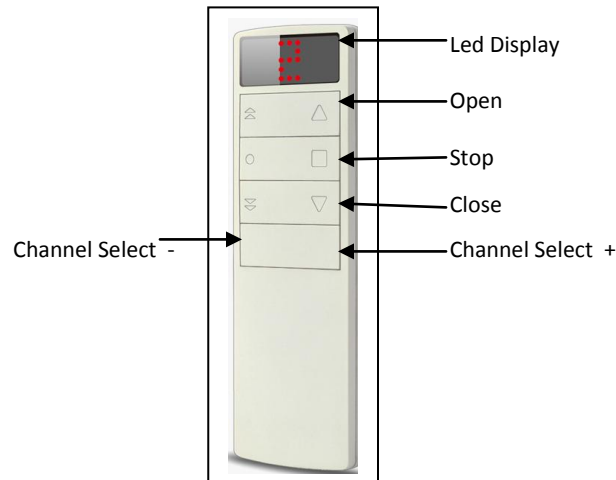

Initialize the Motor

- 1) Insert AAA batteries to the Remote Control.
- 2) Select a "channel" by pressing the button "Channel Select +" or "Channel Select -"
- 3) At the bottom of the Motor, use a pin to press and hold the "Pin Hole" 5 seconds till the "Light" next to the "Pin Hole" is solid on.
- 4) Press the Remote Control "Open" button 3 times. Carrier on the Track starts moving.
- 5) Let it go all the way to the end and stop itself.
- 6) Press "Close" button on the Remote Control. Let the Carrier moves to the other end and stop itself.
- 7) Press "Open" button on the Remote Control. Let the Carrier moves to the other end and stop itself.
- 8) Done. It is ready to operate the curtain: Open, Close or Stop by the Remote Control.

Pairing Remote Control with Motor

- After the initialization as shown above, the Motor has memory of the track distance.
 - More channels or additional Remote Control(s) can be assigned to the Motor.
 - Simply repeat steps 2) to 4) of the above to pair them.
 - All channels and all Remote Controls will operate the Motor.
- It is for the purpose of grouping multiple Curtains to be operated simultaneously when they are assigned the identical channel# and each of them can be operated individually with a different channel #.

Reverse the Motor direction

- At the bottom of the Motor, use a pin to press and hold the "Pin Hole" 5 seconds till the "Light" next to the "Pin Hole" is solid on.
- Press and hold the Remote Control "Close" button for a few seconds till the "Light" at the Motor flashes 3 times. Done.

Reset the Motor (Clearing all Remote Control channels and memory of track distance)

- 1) On the Motor, press and hold the "pin hole" for 5 seconds with a pin till the "light" is on. Release the pin.
- 2) Then again, press and hold the same "pin hole" a few seconds till the "light" blinks 3 times and goes off.
- 3) Again, press and hold the "pin hole" for 5 seconds till the light is on, then press the pin hole 3 times. "Light" blinks 3 times and goes off. Done. All cleared.

Question? Support@ElectriCurtain.com